
tel. +38 044 225 93 72 · +38 067 566 0 566
kyuri@ec-cibo.kiev.ua · www.ect.kiev.ua
27 Vadyma Hetmana St., Kyiv, 03056, Ukraine

Conveyor for folding and rolling crêpes

Made in Ukraine • two-row three-section conveyor with attachments • Category: Crêpe lines

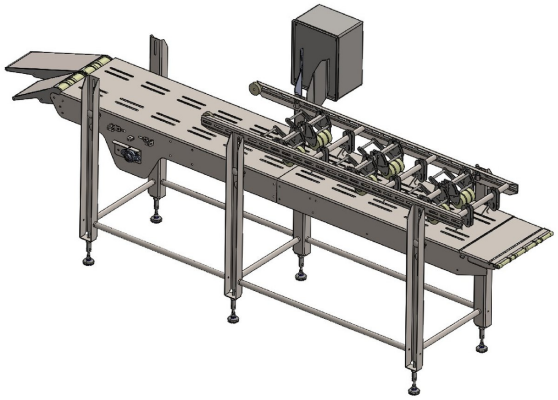

General view of the conveyor: idle, central and drive sections with attachments

Application

A system for transferring and processing crêpes: folding into an envelope or rolling into a tube. A three-section two-row conveyor with knife-edge belt transfer both at the discharge and at the loading end. Folding is performed by sets of turning hooks and pressure rollers (envelope) or by a net (tube), mounted on the central section.

Composition and design

— idle conveyor section 300 mm, hinged — belt tension is easily released for access and washing;
— central section 2000 mm with mounting points for six attachments;
— drive section 500 mm with a geared motor, a double independently adjustable area with knife-edge belt transfer;
— turning hooks (3 sets);
— pressure rollers (3 sets);
— net for rolling into a tube;
— stainless steel control panel.

The frame and all parts in contact with the product are stainless steel or food-grade plastics. The polyurethane-coated belt complies with the requirements for conveying unpacked food under FDA 21CFR, EC 1935/2004 and EU 10/2011. Most attachments are easily removed for washing; the design is open, with a minimum of hidden surfaces. The drive is a geared motor with frequency control; operation from the panel or remotely from external automation systems.


Technical data

Parameter	Value
Overall length	3600 mm
Conveyor width	680 mm (1000 mm with supports)
Belt height from the floor	900–1000 mm (adjustable)
Belt row width	125 mm • 2 rows
Crêpe diameter	150–200 mm
Processing modes	folding into an envelope • rolling into a tube

tel. +38 044 225 93 72 · +38 067 566 0 566
kyuri@ec-cibo.kiev.ua · www.ect.kiev.ua
27 Vadyma Hetmana St., Kyiv, 03056, Ukraine

Power	0.75 kW • 380 V
Hygiene	open design, removable attachments, FDA/EU belt
Basic dimensions	adjusted to order

Dimensional drawing

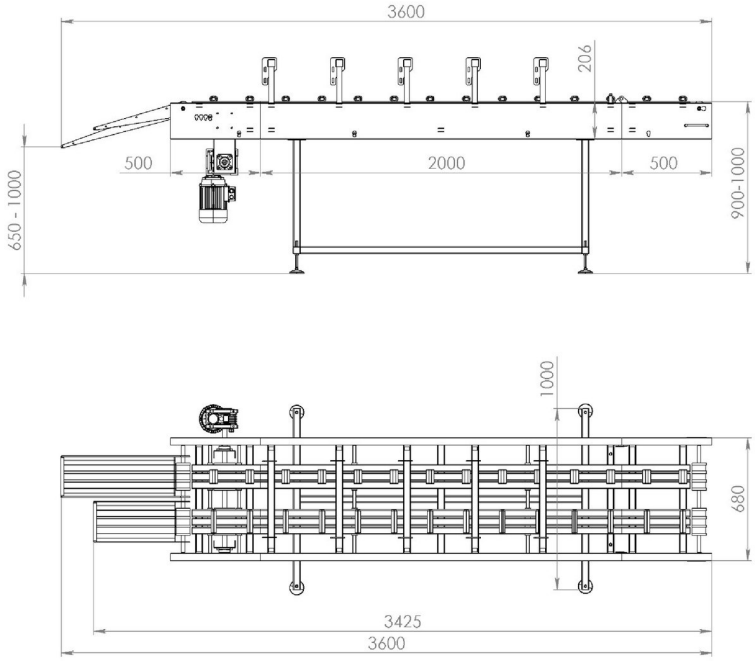

Supply and service

Made to order (basic dimensions can be adjusted), delivery, installation and commissioning, staff training, warranty and post-warranty service.

The data given are indicative; the exact configuration is selected to match the customer's product.